


GIPS BAND


Single-sided nail point sealant tape for profiles

Support film and closed-cell polyethylene (PP) foam profile with acrylic glue

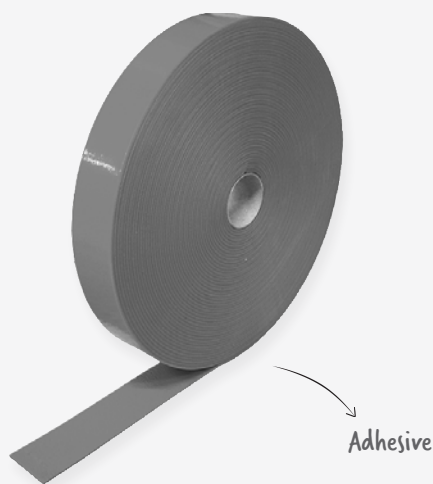


INTUITIVE

Easy to apply adhesive profile, also using LIZARD unwinder



ACOUSTIC INSULATION

Anti vibration for ribbing on the counterwall structure



CODES AND DIMENSIONS

code	ex code	s [mm]	B [mm]	L [m]	pcs/box
GIPSBAND50	D67464	3	50	30	10

TECHNICAL SPECIFICATIONS

property	standard	value
Temperature resistance	-	-30 / +80 °C
Specific weight	ISO 845	approx. 25 kg/m ³
Tear strength MD/CD	ISO 1926	325 / 220 kPa
Elongation MD/CD	ISO 1926	125 / 115 %
Compression strength	ISO 3386/1	2 kPa at 10 % compression
	ISO 3386/1	3 kPa at 25 % compression
	ISO 3386/1	5 kPa at 50 % compression
Reaction to fire	DIN 4102 / EN 13501	class B2 / E
Water absorbancy	ISO 2896	< 2 % vol.
Thermal conductivity	-	0.04 W/mK (a +10 °C)
Storage temperature	-	+5 / +25 °C
Solvents	-	NO
VOC emissions	-	< 0.02 % (class A+)

NOTE: Store the product in a dry, covered location