

# SNAP

## CONNECTOR AND SPACER FOR DECKS

### VERSATILITY

It can be used both as a concealed connector for boards and as a spacer between boards and battens. SNAP is developed to be used individually but also in combination. In this case, SNAPs have dual functionality as connector and spacer, for maximum efficiency and convenience.

### MICRO VENTILATION

When used as a spacer, SNAP prevents water stagnation thanks to the micro-ventilation created under the decking boards.


### DURABILITY

PP (glass fiber reinforced polypropylene) material provides excellent durability at an affordable price.



CALCULATION  
TOOL

### BOARDS

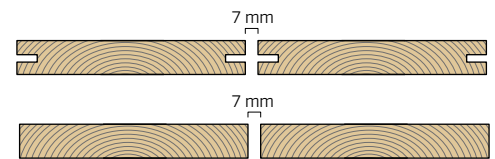

### FASTENING ON



timber



WPC




aluminium

### MATERIAL

**PP**

PP Reinforced polypropylene

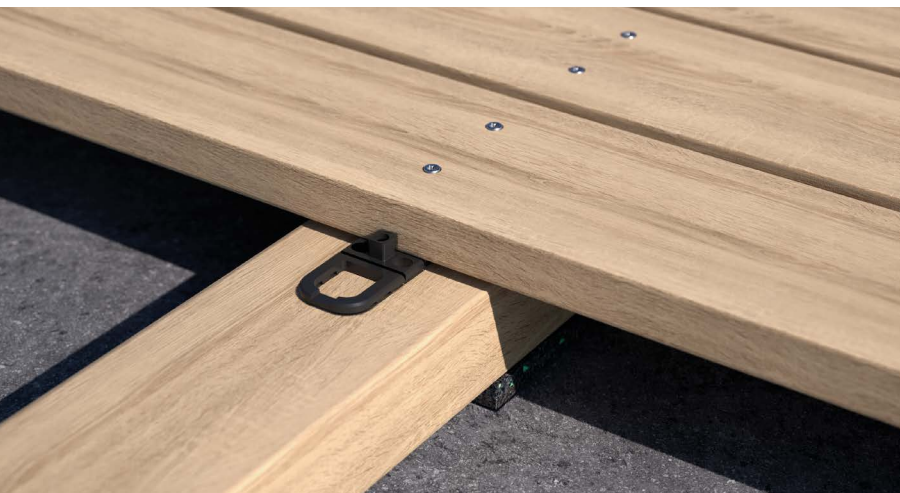

### FIELDS OF USE


Outdoor use.

Fastening of timber or WPC boards with symmetrical milling on substructures in wood, WPC or aluminium.

## CODES AND DIMENSIONS

CODE	material	P x B x s [mm]	f [mm]	Ø [mm]	pcs
SNAP	polypropylene	70 x 28 x 4	7	5,5	100

### KKT COLOR fastening on timber



d <sub>1</sub> [mm]	CODE	L [mm]	pcs
5	KKTN540(*)	43	200
TX 20	KKTN550	53	200

(\*) Full threaded screw.



d <sub>1</sub> [mm]	CODE	L [mm]	pcs
5	KKTM550	53	200
TX 20	KKTM560	60	200

### KKZ A2 | AISI304 fastening on hardwood





d <sub>1</sub> [mm]	CODE	L [mm]	pcs
5	KKZ550	50	200
TX 25	KKZ560	60	200

### KKZ EVO C5 fastening on hardwood




d <sub>1</sub> [mm]	CODE	L [mm]	pcs
5	KKZEVO550C5	50	200
TX 25	KKZEVO560C5	60	200

## GEOMETRY

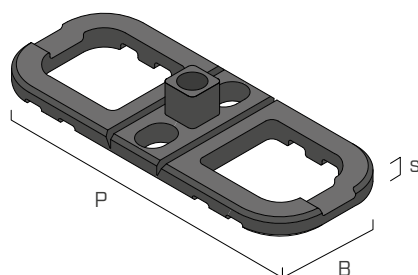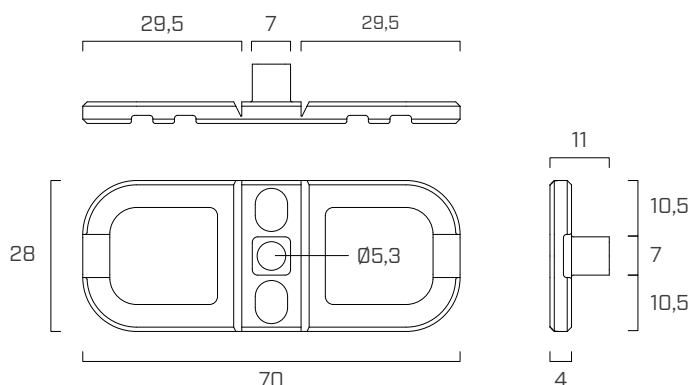


## INSTALLATION

### VISIBLE FASTENER




### CONCEALED FASTENER



### GROOVING

Min. thickness	F	4 mm
Min. recommended height H	H	7 mm

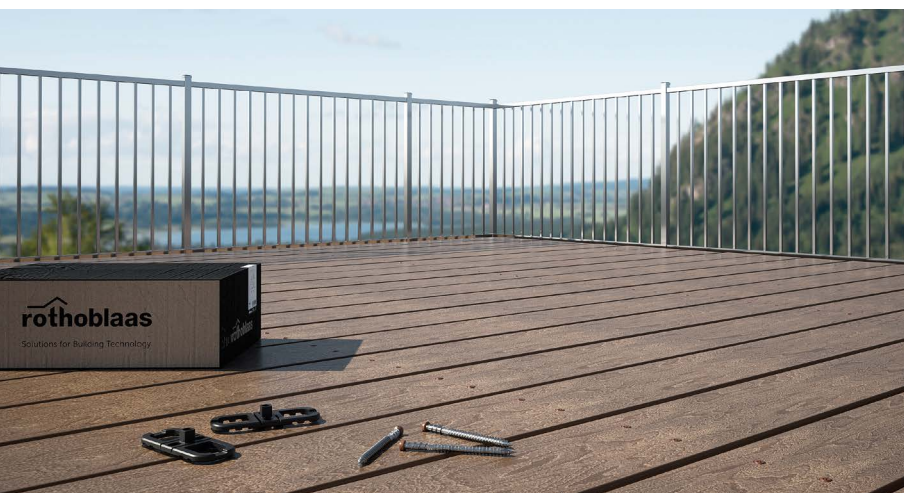

## DECK KIT

SNAP, KKT screws, TERRA BAND UV tape and GRANULO or NAG batten support are the best products for building a strong and durable terrace quickly and economically.